
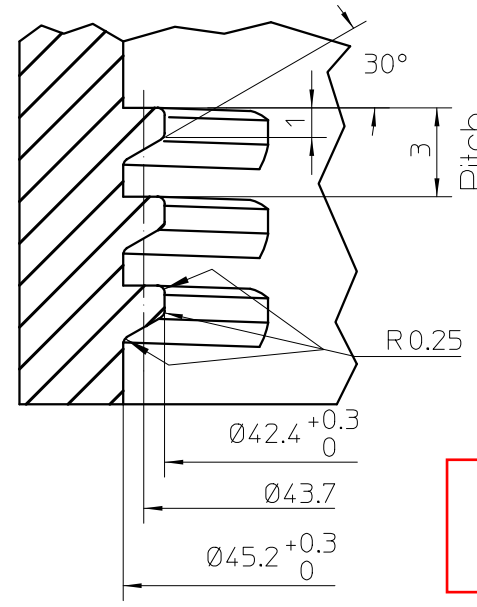
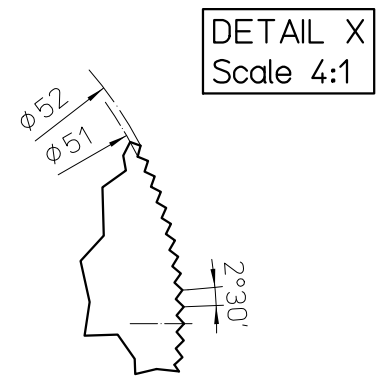


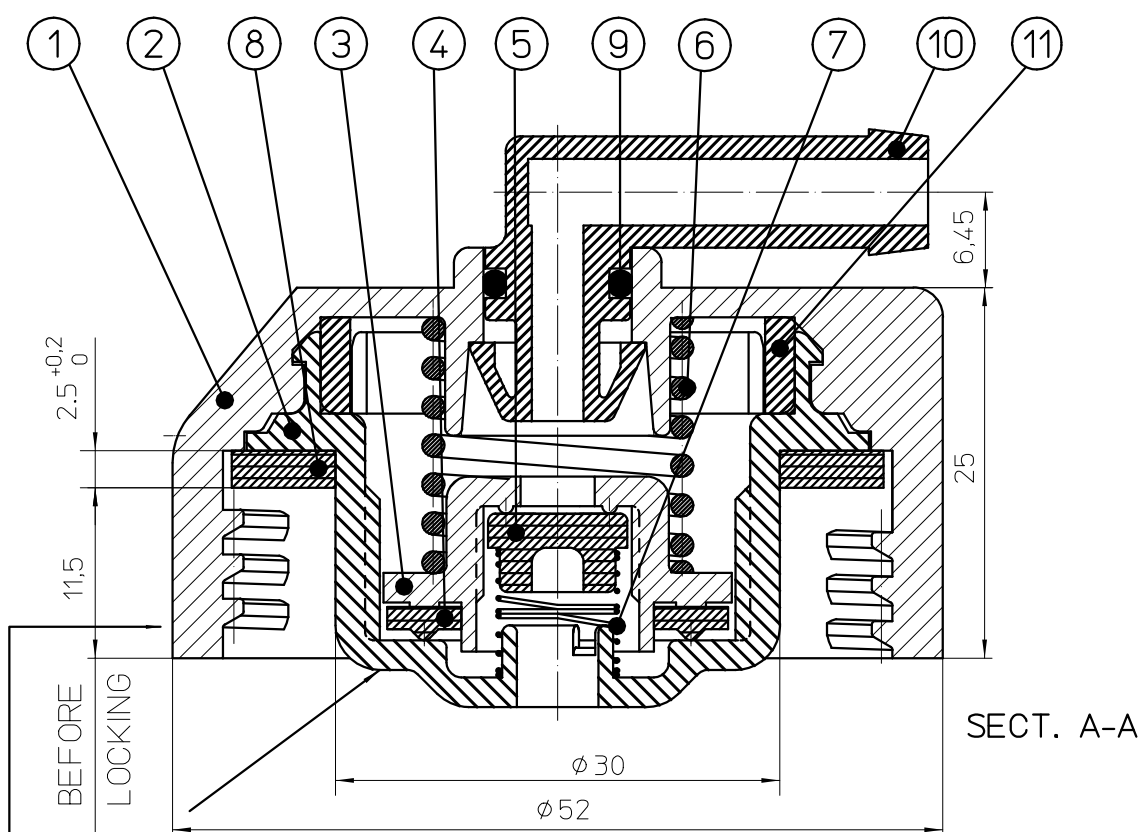


UNCONTROLLED COPY
in case of drawing updating/revision
NO AUTOMATIC
resubmission will follow

DEPRESSION SETTING-OPEN SETTING	bar	0.04 ± 0.10 - 0.5 +/-0.1
T.MIN - T.MAX	°C	-40 / +120
FLOW RATE	l/min	0.8
SCREW TORQUE	Nm	3
FLAMABILITY	UL 94	SEE MATERIAL TABLE
OPERATIVE STATEMENTS	MEASUREMENT UNIT	VALUE

11	1	GASKET	EPDM PEROX-55 - BLACK COLOR
10	1	BREATHER PIPE	PP-GF30 HB - BLACK COLOR
9	1	O RING	EPDM PEROX-60 BLACK COLOR
8	1	GASKET	EPDM PEROX-60 BLACK COLOR
7	1	DEPRESSION SPRING	Stainless Steel
6	1	PRESSURE SPRING	Stainless Steel
5	1	DEPRESSION GASKET	LSR-50 - RED COLOR
4	1	PRESSURE GASKET	LSR-70 - RED COLOR
3	1	PRESSURE VALVE	PA 66-GF30 HB - BLACK COLOR
2	1	CAP	PA 66-GF30 HB - BLACK COLOR
1	1	THREADED COVER	PP-GF30 HB - BLACK COLOR
POS.	Q.TY	DENOMINATION	MATERIAL

MTA		MTA P/N	5050090/20	Denom. RADIATOR CAP 0.5 bar BLACK	
		Draw No.	B0-030.008A	Used for MOTOR VEHICLES	
Rel. Level	APPROVED		Draw for	CLIENT	Relevant Standard
	Date	Name	Scale	Weight(g)	Lin.Tol.*
Draft.	21/07/1994	L.BASSI	2:1		0.5
Chk	05/03/2012	E.UGGERI			2
PQApp	12/03/2012	M.ROSSI	A3		Dimensions in (mm)
App.	12/03/2012	M.CORBANI			
				Sheet	
				1/1	

18	/20 ADDED TO P/Ns FOR TRANSFER TO ANOTHER PRODUCTION PLANT (FROM MTA ITALY TO MTA BRASIL)			
No.	Reason for Revision		Date	05/03/2012
			Name	E.UGGERI

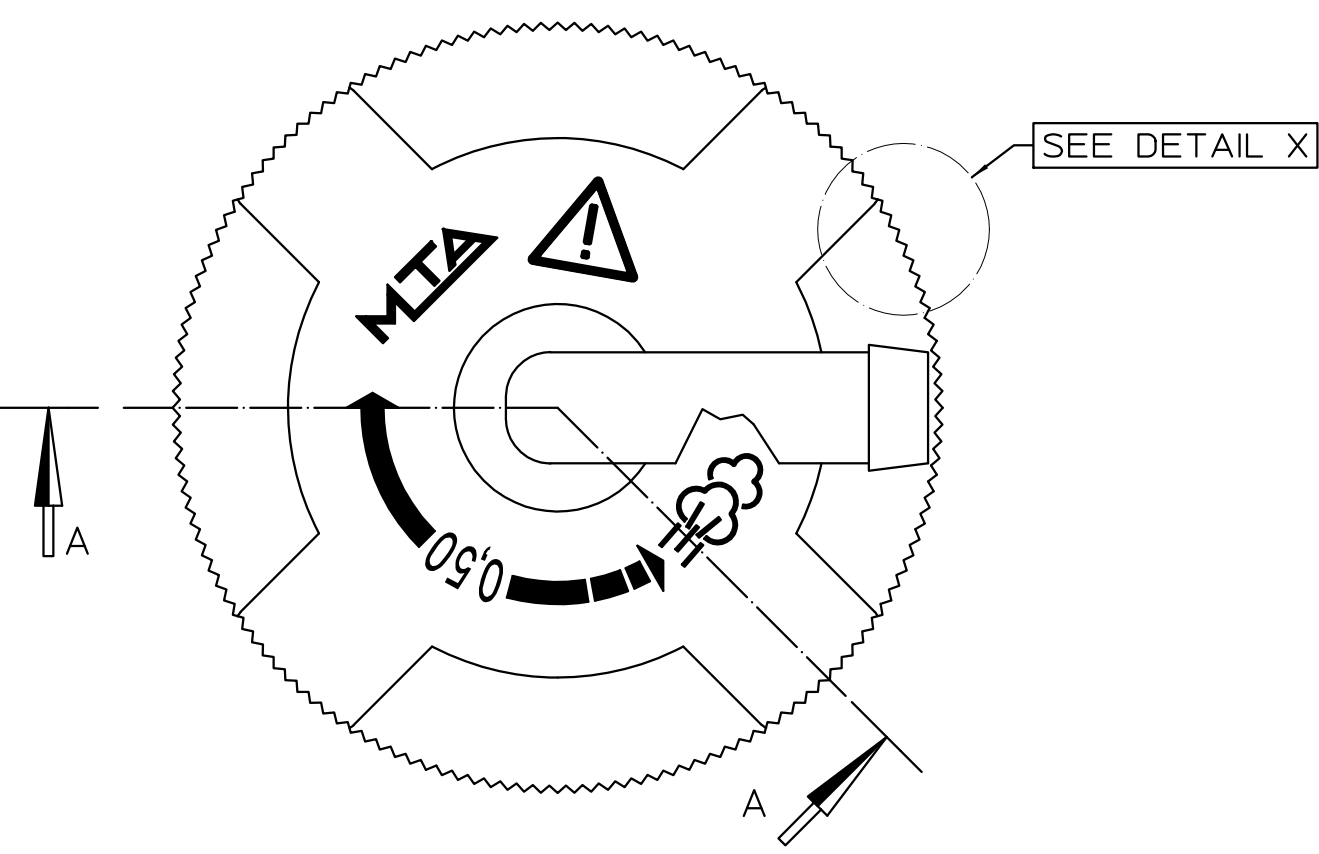

All proprietary rights reserved by MTA S.p.A. - This drawing shall not be reproduced, or in any way utilized, for the manufacture of the component or unit herein illustrated and must not be released to other parties, without written consent. Any infringement will be legally pursued.