
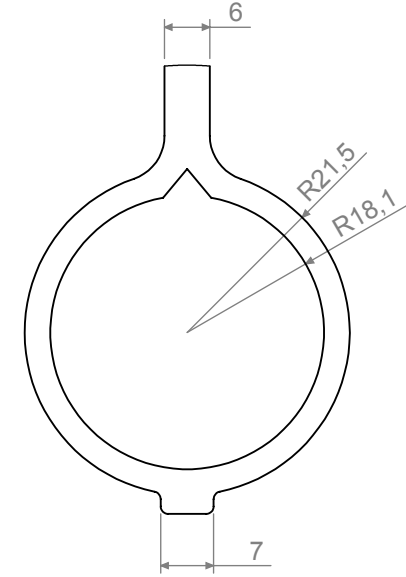
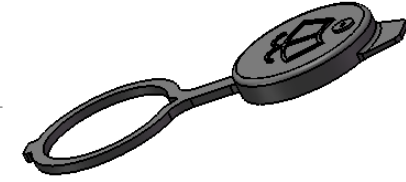
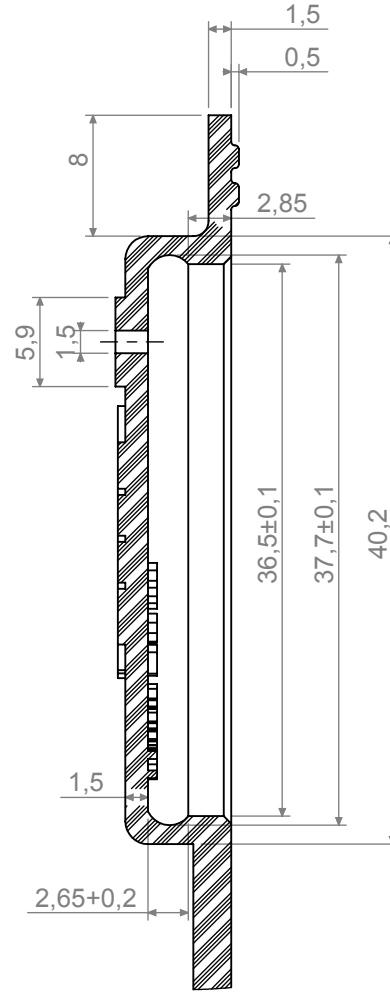


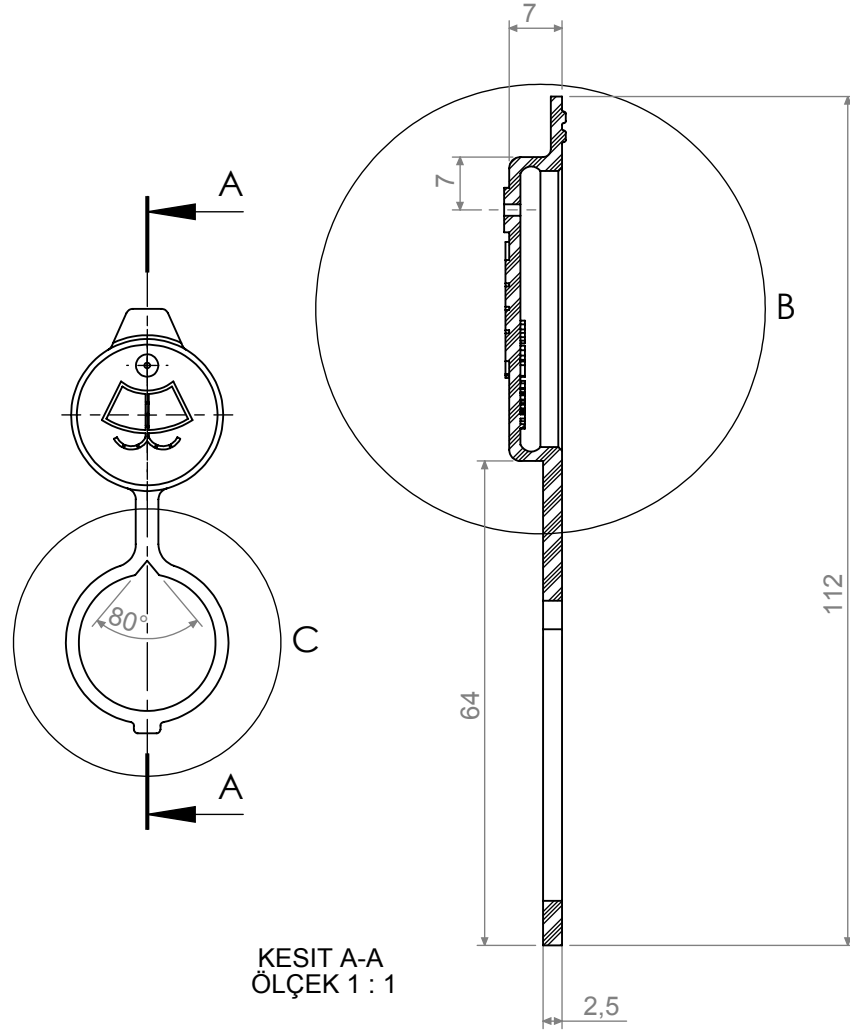

Revisions: R0.04.05.09 R0 İlk yayın.R1- Kapağın depoya geçen bileziğin et kalınlığı 1,5 mm'den 2,5 mm 'ye yükseltildi.22.08.11

GENEL TOLERANS TABLOSU DIN 2768									
TOLERANS SINIFI	0,5 3	3 6	6 30	30 120	120 400	400 1000	1000 2000	2000 4000	
f	Çok Hassas	±0,05	±0,05	±0,1	±0,15	±0,2	±0,3	±0,5	-
m	Hassas	±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2
c	Kaba	±0,2	±0,3	±0,5	±0,8	±1,2	±2	±3	±4
v	Çok Kaba	-	±0,5	±1	±1,5	±2,5	±4	±6	±8

Drawn by	04.05.2009	Arzu ÇAVDAR
Approved by	04.05.2009	Afşin KANDEMİR
Scale	2:1	

Date	04.05.2009	Name-Surname	Arzu ÇAVDAR	Signature	
Part definition	CAM YIKAMA DEPO KAPAĞI MAFSALLI-3				

Drawing	116AC010 R1
Material	LDPE / Siyah
Non -defined Tolerans	(c) Kaba

AFK Otomotiv
Elektromekanik, Plastik
İmalat San. Tic. Ltd. Sti.