
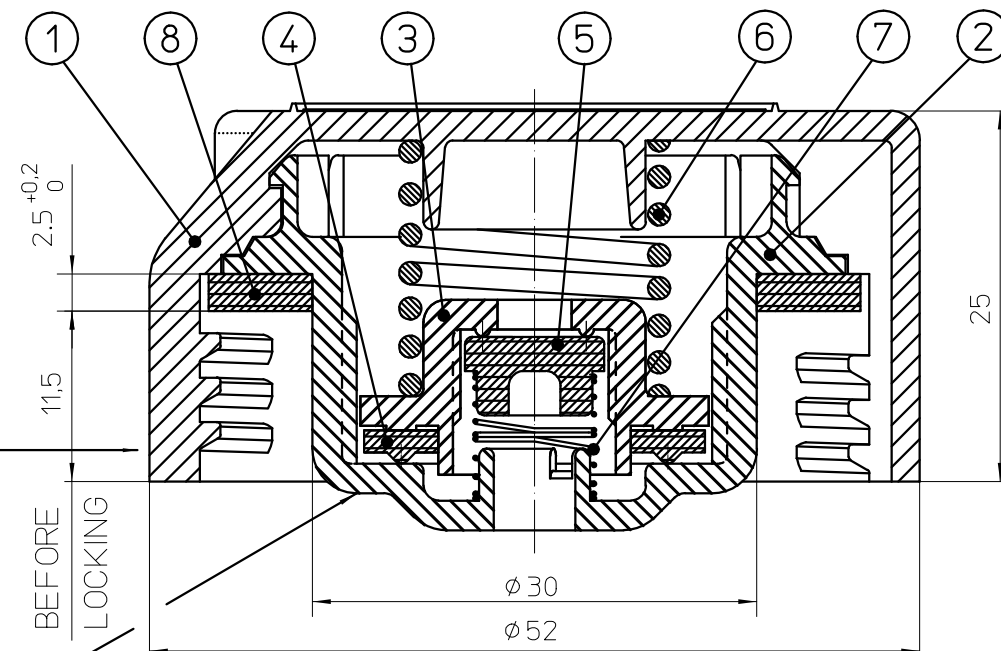


UNCONTROLLED COPY
in case of drawing updating/revision
NO AUTOMATIC
resubmission will follow

SCREW DETAIL
Scale 4:1

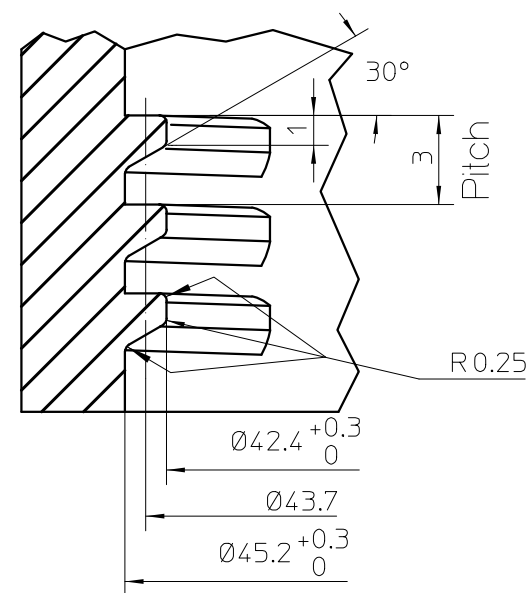

SECT. A-A

IDENTIFICATION AREA
DATE / CODE

DEPRESSION SETTING-OPEN SETTING	bar	0.04 ± 0.10 - 1.0 +/-0.1
T.MIN - T.MAX	°C	-40 / +120
FLOW RATE	l/min	0.8
SCREW TORQUE	Nm	3
FLAMABILITY	UL 94	SEE MATERIAL TABLE
OPERATIVE STATEMENTS	MEASUREMENT UNIT	VALUE


8	1	GASKET	EPDM PEROX-60 - BLACK COLOR
7	1	DEPRESSION SPRING	Stainless Steel
6	1	PRESSURE SPRING	Stainless Steel
5	1	DEPRESSION GASKET	LSR 50 - RED COLOR
4	1	PRESSURE GASKET	LSR 70 - RED COLOR
3	1	PRESSURE VALVE	PA 66-GF30 HB - BLACK COLOR
2	1	CAP	PA 66-GF30 HB - BLACK COLOR
1	1	THREADED COVER	PP-GF30 HB - BLACK COLOR

POS.	Q.TY	DENOMINATION	MATERIAL
------	------	--------------	----------

MTA		MTA P/N	5014861/20	Denom. RADIATOR CAP 1 bar BLACK	
		Draw No.	B0-030.020C	Used for MOTOR VEHICLES	
Rel. Level	APPROVED		Draw for	CLIENT	Relevant Standard
	Date	Name	Scale	Weight(g)	Lin.Tol.±
Draft.	07/02/1995	L.BASSI	2:1		0.5
Chk	05/03/2012	E.UGGERI			2
PQApp	12/03/2012	M.ROSSI	A3		Sheet 1/1
App.	12/03/2012	M.CORBANI			
				Dimensions in (mm)	

8	/20 ADDED TO P/Ns FOR TRANSFER TO ANOTHER PRODUCTION PLANT (FROM MTA ITALY TO MTA BRASIL)				
---	---	--	--	--	--

No.	Reason for Revision	Date	05/03/2012	Name	E.UGGERI
-----	---------------------	------	------------	------	----------

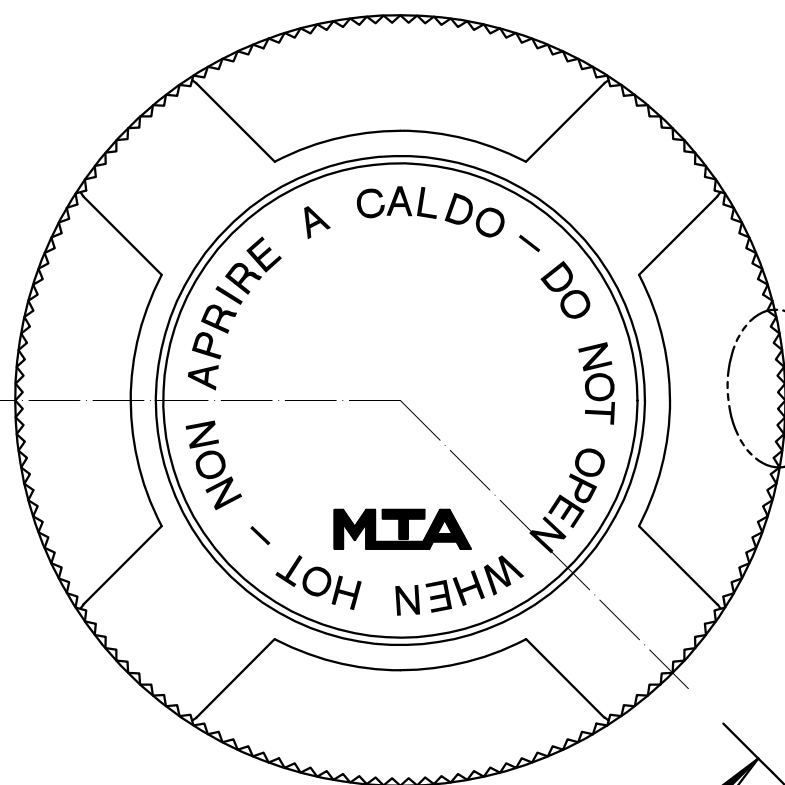

Scale 4:1