

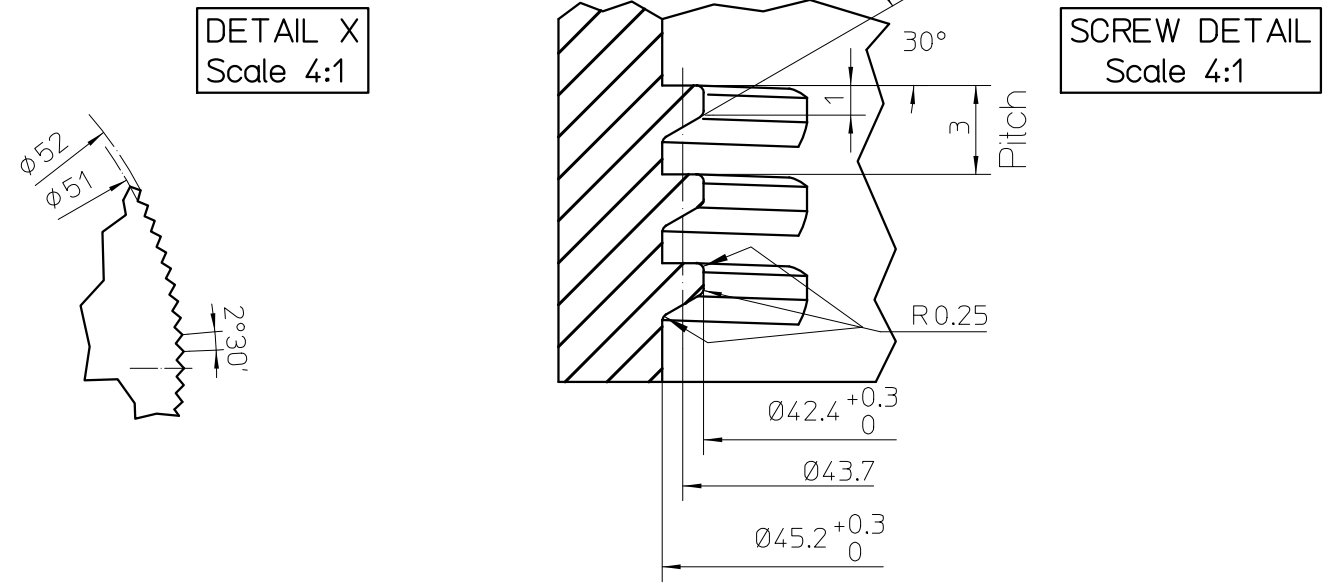


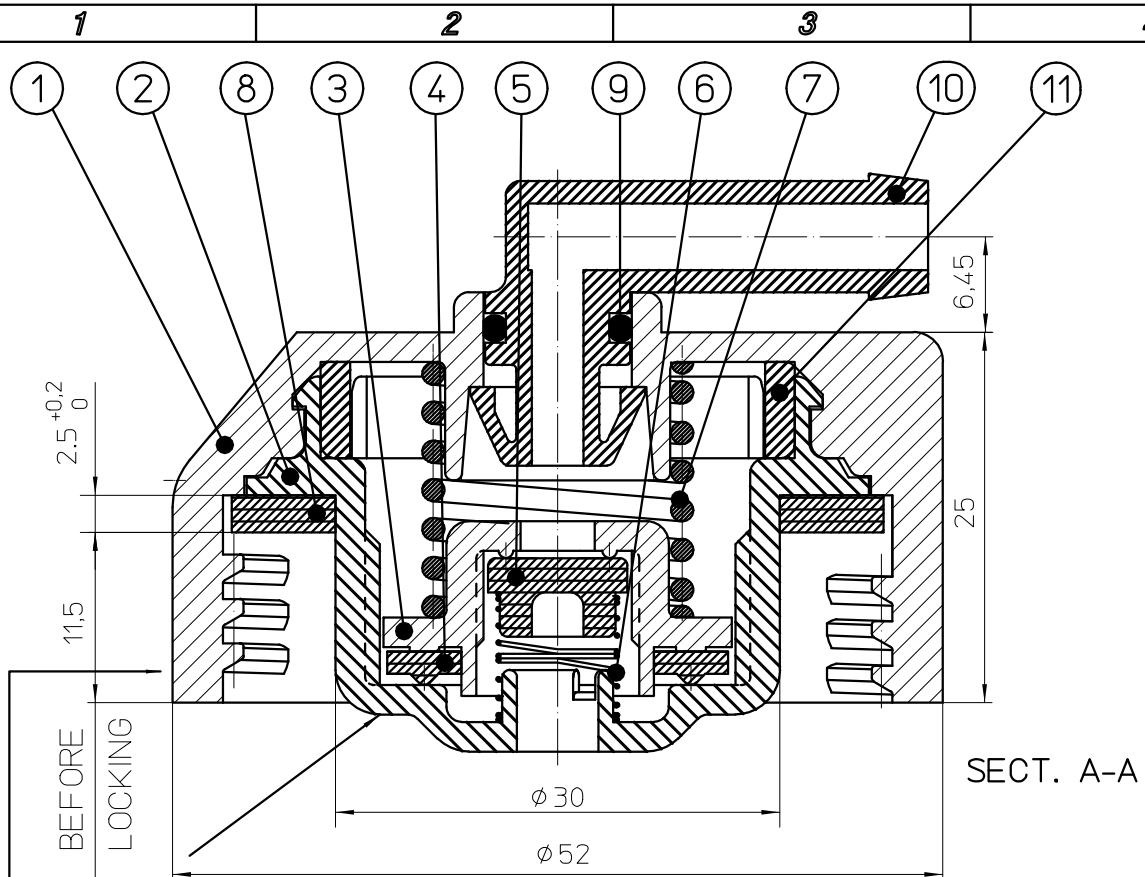



DEPRESSION SETTING-OPEN SETTING	bar	0.04 ÷ 0.10 - 1.0 +/-0.1
T.MIN - T.MAX	°C	-40 / +120
FLOW RATE	l/min	0.8
SCREW TORQUE	Nm	3
FLAMABILITY	UL 94	SEE MATERIAL TABLE
OPERATIVE STATEMENTS	MEASUREMENT UNIT	VALUE

IDENTIFICATION AREA
DATE / CODE

UNCONTROLLED COPY
in case of drawing updating/revision
NO AUTOMATIC
resubmission will follow

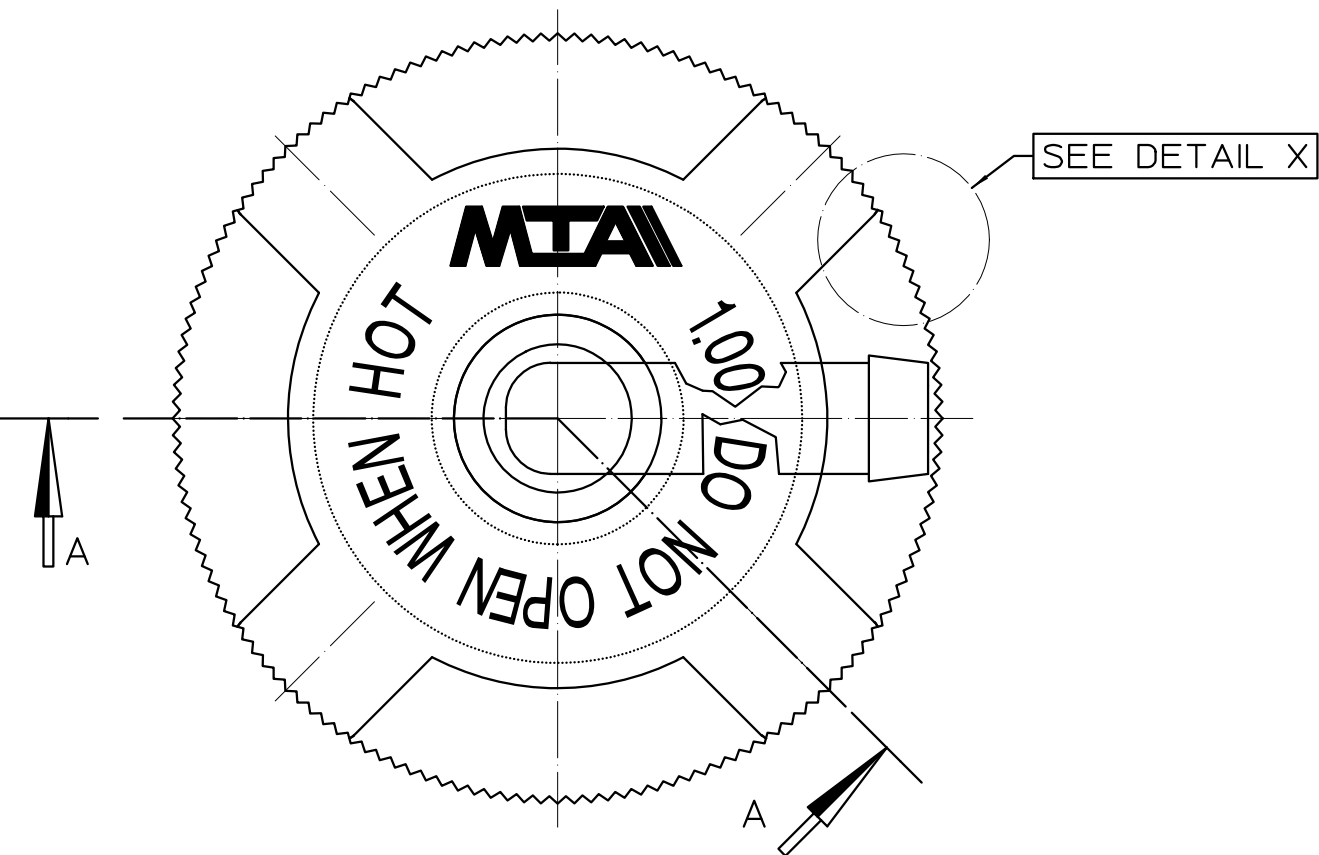

11	1	GASKET	EPDM PEROX-55 - BLACK COLOR
10	1	BREATHER PIPE	PP-GF30 HB - BLACK COLOR
9	1	O RING	EPDM PEROX 60 - BLACK COLOR
8	1	GASKET	EPDM PEROX-60 - BLACK COLOR
7	1	PRESSURE SPRING	Stainless Steel
6	1	DEPRESSION SPRING	Stainless Steel
5	1	DEPRESSION GASKET	LSR-50 - RED COLOR
4	1	PRESSURE GASKET	LSR-70 - RED COLOR
3	1	PRESSURE VALVE	PA 66-GF30 HB - BLACK COLOR
2	1	CAP	PA 66-GF30 HB - BLACK COLOR
1	1	THREADED COVER	PP-GF30 HB - BLACK COLOR

POS.	Q.TY	DENOMINATION				MATERIAL				
		MTA P/N		5114901/30		Denom. RADIATOR CAP 1 BAR BLACK				
		Draw No.		B0-030.021B		Used for MOTOR VEHICLES				
Rel. Level		APPROVED		Draw for		CLIENT		Relevant Standard		
Date		Name		Scale	Weight(g)	Lin.Tol.±	Ang.Tol.±	Material SEE TABLE		
Draft.	25/07/1994	L.BASSI		2:1		0.5	2			
Chk	05/03/2012	E.UGGERI						Coating SEE TABLE		
PQApp	12/03/2012	M.ROSSI		A3		Dimensions in (mm)	Sheet 1/1	Color SEE TABLE		
App.	12/03/2012	M.CORBANI								
6		/30 ADDED TO P/Ns FOR TRANSFER TO ANOTHER PRODUCTION PLANT (FROM MTA ITALY TO MTA BRASIL)								
No.	Reason for Revision					Date		05/03/2012	Name	E.UGGERI

All proprietary rights reserved by MTA S.p.A. - This drawing shall not be reproduced, or in any way utilized, for the manufacture of the component or unit herein illustrated and must not be released to other parties, without written consent. Any infringement will be legally pursued.